


**HYBRID**  
ELECTRIFIED

**SBM**  
MINERAL PROCESSING



**REMIX**  
**600X**



# MAXimise your results!

Mobile mineral processing technology made by SBM – advantages right down the line

SBM is pursuing a simple goal with its track-mobile processing plants: We offer the technically and economically leading solution in every power class.

Efficient full-hybrid drives, best-in-class crushing performance, productive screening and conveying equipment - all packaged in highly mobile plant technology with exemplary ease of operation.

## DRIVE WITH A FUTURE

Constantly rising fuel costs, stricter environmental regulations, high burdens due to maintenance and repair:

**It has never made more sense to change to intelligent hybrid technology in mobile processing!**

## CRUSHING TECHNOLOGY

SBM crushers combine maximum feed size and high throughput with precisely defined product quality: **Benefit from our decades of experience in all areas of crushing technology.**



## PERFORMANCE WITHOUT COMPROMISE



Optimum transfer, high throughput of the standard pre-screening and optional secondary screening unit and large stockpile volumes of the product conveyor belts ensure **full productivity and added value in operation.**

## MORE MAN MORE MACHINE

Our constantly further developed **control system CRUSH CONTROL** actively supports your staff in all work steps and **optimises your processes in operation and maintenance.**

# Hybrid Pioneers - since 1980

Benefit from the most sophisticated drive system in the market!

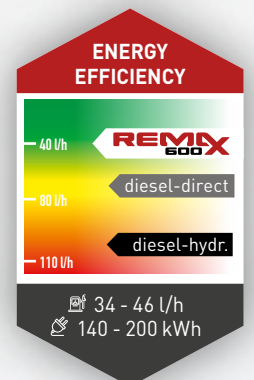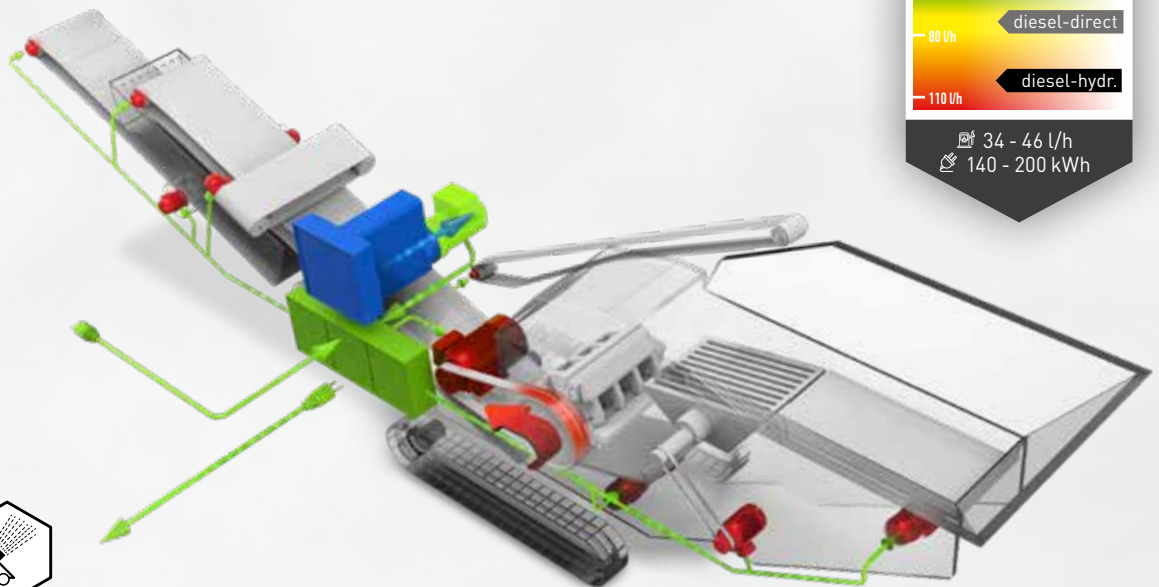

## DRIVE SYSTEM REMAX 600

|                                |                            |
|--------------------------------|----------------------------|
| Motor                          | CUMMINS X15*               |
| Operating speed                | 4-stage                    |
| Tank capacity Diesel/AdBlue    | 720 l / 110 l              |
| Generator                      | 520 kVA                    |
| Electric motor crusher         | 250 kW (up to 375 kW peak) |
| Plug-in grid connection (opt.) | 400 V, 520 kVA; 50 - 60 hz |
| Plug-out power supply          | 400 V, 63A                 |

\* comply with the current emission regulations

Only SBM consistently relies on the advantages of the **purely electrical drive of conveying, crushing and screening components** in mobile crushing plants of all power classes.

In **independent diesel operation**, a motor/generator unit supplies the energy at low, constant speeds: **low-emission, quiet and extremely economical.**

All electric drives with their cable and plug-in connections are **practically maintenance-free**, do not cause any thermal or stand-by losses and decisively reduce environmental risks due to large hydraulic oil volumes.

In **optional mains operation**, you simply flip a switch, and everything about the plant works as usual - **only without diesel.**



# REMAX 600: The benchmark in the 600 t/h class

More output, better quality, greater product variety with just one machine

## HARD FACTS

|                                 |                                                |
|---------------------------------|------------------------------------------------|
| Inlet opening                   | 1.380 x 1.000 (1.200*) mm                      |
| Feed size (max. diagonal space) | 0 - 1.000 mm (up to 800 kg per single piece)** |
| Feed capacity                   | max. 600 t/h***                                |
| Final grain size                | 0 - 22 bis 0 - 90 mm                           |

\* Inlet cover open

\*\* Iron reinforcement thickness max. 30 mm and protruding from the concrete block max. 200 mm

\*\*\* Depending on feed material, feed size and desired final grain size

Large feed volume – highly efficient pre-screen 1400 impact crusher – high-throughput 3-deck secondary screen: **With the REMAX 600, SBM is once again setting the real standards in flexible and profitable mobile crushing.**

Whether as a primary crusher in recycling with reinforced concrete rubble, construction debris and asphalt or as a compact, versatile secondary crusher in a wide variety of raw materials:

**We deliver high output, high product quality and low operating costs in a package.**



**USE**  
natural sandstone, sand & gravel

**LIMESTONE**  
0/1.000 to 0/90

**Product performance:** 600 t/h  
**Diesel consumption:** 50 l/h  
**Impact bars:**  
2 high / 2 low, hard & tough




**USE**  
natural sandstone, sand & gravel

**RIVER GRAVEL**  
0/500 to 0/32

**Product performance:** 320 t/h  
**Diesel consumption:** 42 l/h  
**Impact bars:**  
4 high, hard-chrome plated ceramic




**USE**  
construction debris & recycling

**CONCRETE & BRICK**  
0/800 to 0/45

**Product performance:** 340 t/h  
**Diesel consumption:** 38 l/h  
**Impact bars:**  
2 high / 2 low, hard & tough ceramic




**USE**  
construction debris & recycling

**ASPHALT SLABS**  
to 0/22


**Product performance:** 300 t/h  
**Diesel consumption:** 48 l/h  
**Impact bars:**  
4 high, hard-chrome plated ceramic



## Get your money off the road!

Easy one-piece transport – minimal set-up times – optimal logistics on site

During the development of the REMAX 600, **optimal transportability** was at the top of the list of specifications. Despite being unprecedentedly fully equipped, the large SBM plant meets important transport dimensions and thus enables **permanently economical site operations** with quick changes of location even in large areas of activities. The well thought-out positioning and kinematics of all attachments as well as automated routines of the system control enable **tool-free set-up and dismantling in one-man operation** – quickly, safely and even under the most adverse conditions. A large ground clearance and good slope angles make the REMAX 600 **highly mobile on site**: This results in short distances in primary crushing and ensures fast loading cycles in the high-capacity production of up to five final aggregate sizes.

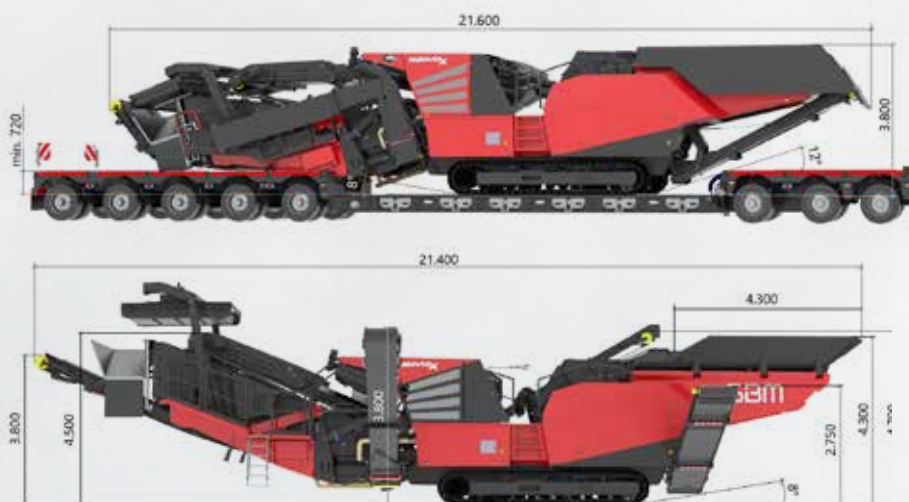

| TRANSPORT DIMENSIONS                 | LENGTH    | WIDTH    | HEIGHT   | WEIGHT*   |
|--------------------------------------|-----------|----------|----------|-----------|
| without secondary screening unit     | 15.700 mm | 3.490 mm | 3.800 mm | 62.500 kg |
| with secondary screening unit 1-deck | 21.600 mm | 3.490 mm | 3.800 mm | 76.500 kg |
| with secondary screening unit 2-deck | 21.600 mm | 3.490 mm | 3.800 mm | 77.750 kg |
| with secondary screening unit 3-deck | 21.600 mm | 3.490 mm | 3.800 mm | 79.000 kg |

\*total weight including all options

## FREQUENCY-CONTROLLED FEEDING CHUTE

- width: 1,300 mm
- wear lining made of highly wear-resistant steel
- automatic control of the feeding speed according to crusher load



## ACTIVE PRE-SCREENING

- 2-deck circular vibratory screen
- width: 1,300 mm x length: 2,400 mm
- separate/complete discharge/ bypass of the screen fractions via manual 3-way-flap

## PRE-SCREENING CONVEYOR

- discharge height: 2.850 mm
- stockpile capacity up to 150t
- hydraulic swiveling for transport and in operation



## 9,0 m<sup>3</sup> FEED HOPPER

- highly wear-resistant steel construction
- three-sided, folding walls
- automatic locking device



## DRIVE FRAME AND TRACK RUNNING GEAR

- reinforced and weight-optimised frame structure
- track running gear integrated in the frame
- proportional drive
- speed: max. 1.25 km/h
- climbing ability: 27 %

## CRUSHER DISCHARGE CHUTE

- width: 1,500 mm
- wear lining made of highly wear-resistant steel
- frequency-converter-controlled drive with cleaning function



## CRUSHER DISCHARGE CONVEYOR

- quality: Rip-Stop
- discharge height: 4,500 mm
- stockpile capacity up to 180t
- hydraulic folding for transport

## MAGNETIC SEPARATOR

- permanent or electromagnet (optional)
- optional: permanent magnet with longitudinal removal, hydraulically supported
- each hydraulically height-adjustable via radio remote control

## 1-/2-/3-DECK SECONDARY SCREENING UNIT (OPTION)

- 1-, 2- or 3 deck circular vibratory screen with twin drive
- screen size 1,800 x 5,500 mm
- fine and medium size conveyors hydr. foldable
- total stockpile volume up to 160 t
- easy to dismount  
weight 1-deck: approx. 14,000 kg  
weight 2-deck: approx. 15,250 kg  
weight 3-deck: approx. 16,500 kg

**HYBRID  
ELECTRIFIED**

## OVERSIZE MATERIAL RETURN CONVEYOR

- infinitely adjustable belt speed
- hydraulic swiveling to stockpile
- discharge height: 4,700 mm
- stockpile capacity up to 200t
- hydraulic folding for transport



**REMAX  
600X**



## OPTIONS

- single/double/triple wind sifting with frequency converter
- plant mains operation (plug-in)
- single-roll belt weighers (all fractions)
- water spraying at crusher inlet and conveyor discharges

# One step further again with SBM

Automated gap adjustment and wear detection for more productivity

The 1400 impact crusher incorporates our decades of experience in electrically driven crushing technology.

With the newly developed automatic gap adjustment, you can now get even more out of the REMAX 600 – quickly and safely during operation


without emptying the crusher. At the same time, the wear of the impact tools and blow bars is continuously monitored. This ensures the highest quality and full availability of your equipment without time-consuming visual inspections.

## HOUSING

- housing made of high tensile steel
- optimised inlet geometry for maximum penetration into the impact range
- hydraulic opening of the inlet flap and the housing
- simple change of wear parts, interchangeable to ensure optimum utilisation and reduced stock-keeping

## IMPACT TOOLS

- 2 independent crushing stages
- **fully automatic gap adjustment** during operation via plant control or manually via radio command
- simple & easy gap adjustment
- power transmission system of the impact tools
- high foreign matter compatibility due to optimised by-passes
- massive mono-block system - revolvable for maximum utilisation

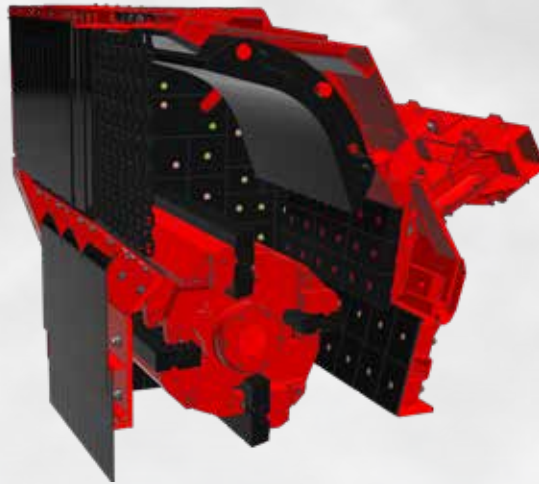

## DRIVE

- electric motor 250 kW (peak load up to 375 kW)
- 4 rotation speeds/ rotor circumferential speed: 33-39 m/s
- belt drive with tensioner

## ROTOR WITH IMPACT BARS

- welded and annealed steel structure
- 1400-crusher
- 4 impact bars
- simple change of impact bars sideways or upwards
- impact bars revolvable for maximum utilisation

## SAFETY

- rotor re-turning device, lockable in all positions
- safe changing of impact bars
- easy removal of blockages
- key system with monitored stand-still of the rotor
- **automatic wear detection** of impact tools and blow bars reduces the inspection effort and prevents failures.

# Always the right tools

Original impact bars made by SBM get the best from your crusher

Only impact bars in OEM quality ensure the full performance of your SBM crusher and prevent uncontrollable wear.

Precisely matched to the crushing characteristics of our technology, our originals simply deliver more, longer, and more economically.



This illustration helps you to choose the optimum impact bars for normal crushing operations. For special applications, please contact your SBM partner.



# Everything under „CRUSH CONTROL“

Up-to-date support in operation and maintenance

Intuitive operability, fast reactions if necessary and significantly reduced workload of machine operators, technicians or dispatchers are the advantages of our control system CRUSH CONTROL with mobile radio-based app solution.

## INTUITIVE & SAFE

- simple plant start/stop via classic push buttons
- operator guidance and status display via 10-inch colour display
- quick adjustment of performance parameters via touch screen

## OPTIMISED PRODUCTIVITY

- continuous monitoring of all plant functions
- load-dependent crusher feeding via frequency-controlled feed chute
- comfortable and safe one-man operation of the complete plant via multifunctional remote control from excavator/loader

## ALWAYS INFORMED

- current location and machine data via **personalised app solution**
- accessible at any time and from everywhere via the internet
- individually configurable information on operating data, production output (opt.) and maintenance status of your plant

## QUICK SUPPORT

- authorised remote access to machine functions by SBM technicians or SBM customer service
- fast troubleshooting or process optimisation without on-site intervention

## THE COMFORT PLUS IN SERIES

- 10 integrated functions
- complete plant operation
- proportional drive control
- radio link monitoring with emergency shutdown



Find here  
the access to  
our app.

# The professionals at your side

Comprehensive dealer support for all industries

We are continuously expanding our international dealer network with strong and experienced sales and service partners.

Together with our product specialists, they will find the right solution for you and accompany you throughout the whole life of the plant.

Find your  
SBM partner in your region here



## CUSTOMER SERVICE AND SALES

The trained customer consultants of our trade partners will support you in selecting the track-mobile crushing plants best-suited for YOU with the corresponding equipment. They will provide you with information and forecasts on production output as well as investment costs, making your investment transparent and secure in the medium- and long-term range.



## PARTS LOGISTICS

SBM partners provide professional back-up in the quick supply of spare and wear parts, thus ensuring full availability of your key machines.



The **WEB shop** simplifies  
your orders.

## QUALIFICATION

From machine handover to regular training for your employees - our partners offer a wide range of services for every industry.

## MAINTENANCE & SERVICE

Whether it is scheduled regular maintenance, a large all-round service or rapid intervention on the construction site - our partners are ready to help: competent, well-prepared and dependable.

# Our whole experience for you

## SBM Mineral Processing

For more than 70 years we at SBM Mineral Processing have been developing and building machines and plants for the stone and earth industry. In addition to stationary plants, we delivered mobile plants to process aggregates for the concrete technology already at an early stage. Today, we are one of the leading manufacturers of track-mounted processing plants with **SBM MOBILE CRUSHING & SCREENING SOLUTIONS**.

We are true pioneers in the development of diesel-electric drive systems for all power classes, which we have been building for over 60 years. All our plants are „hybrid electrified“ today - thanks to extensive standardisation, they convince in natural stone and recycling operations with their outstanding production performance at low operating costs, maximum availability, and simple and safe operation.

With a qualified, cross-industry dealer and service network in all leading markets of the world, we ensure the sustainable and economic success of our customers.

|      |                                                          |      |                                                              |      |                               |
|------|----------------------------------------------------------|------|--------------------------------------------------------------|------|-------------------------------|
| 1950 | Foundation of SBM                                        | 1980 | First mobile track-mounted crushing plant HYBRID ELECTRIFIED | 2016 | New product line "SBM Mobile" |
| 1960 | First mobile crushing plant on wheels HYBRID ELECTRIFIED | 2014 | Consolidation MFL and SBM Mineral Processing                 |      |                               |



**SBM Mineral Processing GmbH**  
Oberweis 401, 4664 Oberweis, Austria  
Phone: +43 3612/2703-0 · office@sbm-mp.at  
[www.sbm-mp.at](http://www.sbm-mp.at)

