

SW 55 50 SW 55 60



Site mode
speed limiter

Super bright
LCD Display
IP67 rated



Two stage
start inhibitor
safety system

Folding ROPS,
FOPS safety
Frame



Guarded
lights

Front facing
150° wide
angle camera



Hydraulic parking brake
(SAHR) No in field
adjustment required



Highlighted
Steps + Handrails

Nitrotec coated pivot pins
for extended life





Service Access
Via Lockable
Bonnet



Protected IP67
rated 7" LCD
Monitor

15mm solid steel rear
cover for maximum
impact protection



Multi axis joystick



Inclinometer



180°
Powerswivel

Fully adjustable suspension
seat with recoil safety belt
and document pouch



LED rear lights



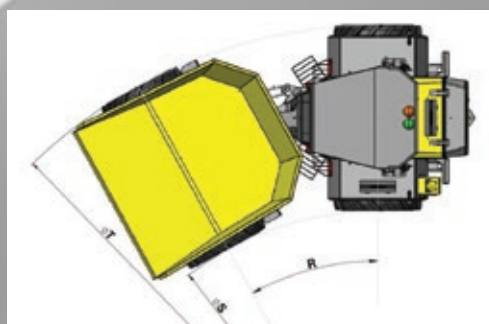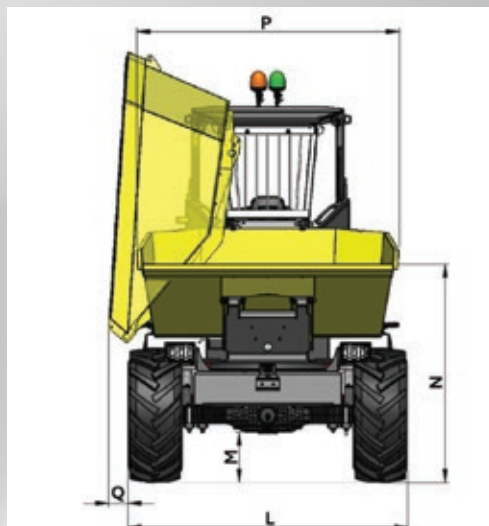

STATIC DIMENSIONS in mm		
	SW5550-C	SW5560-C
A	2210	2490
B	4530	4621
C	1030	974
D	993	1115
E	1767	1863
F	3230	3438
G	2214	2251
H	2967	3005
J	3248	3285
L	1815	2242
M	367	404
N	1667	1746
P	1920	2106
Q	292	156
S	5947	7452
T	9870	12000
U	529	434
V	565	493

CAPACITY:	SW5550-C	SW5560-C
Max. safe load:	5000kg	6000kg
Unladen Weight:	3725kg	4100kg
Heaped:	2633L	3150L
Struck:	2110L	2444L
Water:	1368L	1650L

SW5550
SW5560

ENGINE:	
Make	Doosan 4 Cyl water cooled
Model	D24 DM02VB
Displacement:	2.4 L
Max. power:	55.4kW/74.3bhp @ 2600 rpm
Max. torque:	320Nm @ 1600 rpm
Fuel:	Diesel
Emissions to:	(EU) 2016/1628

TRANSMISSION:	
	Switchable twin mode hydrostatic CVT
	Permanent 4-wheel drive

DRIVE CHARACTERISTICS:		
Forward / Reverse	0-25 km/h	0-26 km/h
	0-15.5 mph	0-16.1 mph
Steering angle:	+/- 32°	+/- 29°
Turning Circle:	9.87m	12m
Gradeability:	50%	50%
Tyres:	12.5/80-18 16PR	405/70-20
Steering:	Priority load sensing hydrostatic centre pivot	
Working brakes:	Multi-plate oil immersed discs mounted on front axle	
Park brake:	Hand operated (SAHR) spring applied hydraulically released	

NOISE LEVELS:		
LWA	101dB(A)	101dB(A)
LPA	83dB(A)	85dB(A)

TANK CAPACITIES:		
Fuel:	56L	56L
Hydraulic:	54L	54L

SKIP:
Hydraulically operated skip tipping to 82°
Heavy duty fully welded skip with high tensile sides 8 mm base
Reinforced around top for greater strength
Operated by a multi axis joystick for increased performance

ELECTRICAL:
Super heavy duty 100SPPLA Battery: 12V, 700CCA, 74Ah
Wiring harness in protective sleeving with auxiliary outputs

HYDRAULICS:
Automotive control hydrostatic pump
Hydraulic test points fitted as standard
Easy access return oil filter on top of tank

SEATING & CONTROLS:
Adjustable suspension seat accessible from both sides
Clear access across dumper
High definition steps and handrails
Super bright warning lights on fully featured display instrument
Steel constructed centre console for extra leg protection
Column mounted directional control lever
Anti-slip floor

SERVICE ACCESS:
Easy access for service/ maintenance
Lockable hinged engine bay doors

STANDARD EQUIPMENT:
Road lighting
Forward facing camera c/w 7" LCD monitor
Flashing amber beacon
Reversing alarm
Recovery hitch
Folding ROPS, FOPS, safety frame
Inclinometer

We reserve the right to change the above specification without prior notice.

Optional Extras

Base unit:

Hardox Skip
Special Colour RAL (yellow parts only)

Cabin:

Rops, Fops Cab Level 2
Air Conditioning
Screen Guard

Towing:

Scharmuller Tow Hitch
7 pin Towing Socket

Tyres:

Grass Pattern 405/70-20

Environment:

Panolin Bio Hydraulic Oil
in Lieu of HVLP 46 Hydraulic Oil

Security:

Cesar Datatag
Telematic Tracking

Additional Safety Options:


Bucket Guard
Radar
360° Camera
Green Light Seat belt warning System
Warning Triangle
Wheel Choc
Mirrors (Rear view attached to Roll Bar)

Maintenance:

Planned Service kits
Toolbox



Coming
Soon

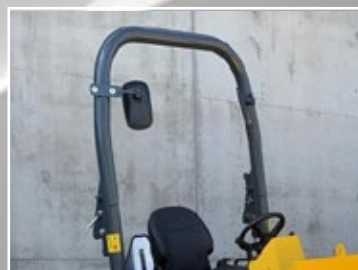

*based on data supplied by engine manufacturers rated speed



Rev 1 - March 2025



NC Engineering (Hamiltonsbawn) Ltd
2 Killyrudden Road
Hamiltonsbawn,
Co. Armagh
Northern Ireland
BT61 9SF
Tel: +44 (0) 28 38 871970
E-Mail: sales@nc-engineering.com
Web: www.nc-engineering.com

www.nc-engineering.com